

內燃平衡 重式叉車

**INTERNAL COMBUSTION
COUNTERBALANCE FORKLIFT**



SHANDONG LEO
IMPORT EXPORT CO., LTD.

力欧叉车30H性能参数:

参数名称			计量单位	CPCD30H
最大起升点载重量			kg	3000
载荷中心			mm	500
最大起升高度			mm	3000
自由提升高度			mm	165
门架倾角		前/后	度	前6°/后12°
速 度	最大行驶速度	满载	km/h	19
		空载	km/h	20
	上升	满载	mm/s	470
		空载	mm/s	490
	下降	满载	mm/s	550
		空载	mm/s	520
最大牵引力		满载/空载	KN	20
最大爬坡能力		满载/空载	%（fan）	15
最小转弯半			mm	2460
外型尺寸	长度	无货叉	mm	2765
		有货叉	mm	3835
	宽度	前轮外侧	mm	1230
		车架	mm	1150
	高度	门架落地	mm	2075
		护顶架	mm	2090
		最大起升	mm	4230
轮胎	规格	前	佳通	28*9-15-12PR
		后	佳通	6.50-10-10PR
轴距			mm	1760
轮距		前	mm	1000
		后	mm	970
离地	最低点（门架）		mm	130
间隙	车架		mm	150
悬距	前悬距		mm	498
最小直角通道宽度			mm	2660
发动机	型号			国三
	额定功率		kw	36.8
	缸数			4
	排量		L	2.67
座椅至护顶架内侧高度			mm	1005
自重（含油水）			kg	4200
货叉（长*宽*高）			mm	1220*125*45



LEO forklift 30H performance parameters:

Parameter name			Unit	CPCD30H
Maximum lifting point load			kg	3000
Load center			mm	500
Maximum lifting height			mm	3000
Free lifting height			mm	165
Gantry inclination		Front/Rear	degree	前6/后12
Speed	Maximum speed	Full load	km/h	19
		Empty	km/h	20
	rise	Full load	mm/s	470
		Empty	mm/s	490
	decline	Full load	mm/s	550
		Empty	mm/s	520
Maximum traction		Full/Empty	KN	20
Max Climb Capability		Full/Empty	% (fan)	15
Minimum turning half			mm	2460
Overall dimensions	length	No fork	mm	2765
		With fork	mm	3835
	width	Front wheel outside	mm	1230
		Frame	mm	1150
	height	Gantry landing	mm	2075
		Roof protection	mm	2090
		Maximum lifting	mm	4230
tyre	Specifications	Front	Giti	28*9-15-12PR
		Rear	Giti	6.50-10-10PR
wheelbase			mm	1760
Track width		Front	mm	1000
		Rear	mm	970
Off ground clearance	Lowest point (gantry)		mm	130
	Frame		mm	150
Overhang	Front overhang		mm	498
Minimum right angle channel width			mm	2660
Engine	Model			GB3
	Rated power		kw	36.8
	Number of cylinders			4
	Displacement		L	2.67
Height from seat to inside of roof protection frame			mm	1005
Self weight (including fuel and water)			kg	4200
Fork (L * W * H)			mm	1220*125*45



SHANDONG LEO
IMPORT EXPORT CO., LTD.



标准配置

标准货叉/电喇叭/宽视野门架/上部进气装置/液压吸油滤芯
标准座椅/二片多路阀/拉索式停车制动/手柄/液压油标尺
充电指示/发动机熄火装置/起升倾斜操纵杆/水温表/油压报警
挡货架/方向开关/起升油路限速阀/随车工具/钥匙开关/倒车灯
后部组合灯/牵引销/橡胶踏板垫/制动器/倒车蜂鸣器/护顶架防雨罩
前照灯/旋风式空气滤清器/转向指示灯/倒车镜/花纹耐用轮胎
倾斜可调方向盘/指针式组合仪表/灯光开关/计时表/
倾斜油路自锁阀/液晶组合仪表/灯护架/空滤器堵塞报警
全液压动万转向/液压回油滤芯

Standard Configuration

Standard fork/Electric horn/Wide view gantry/Upper air intake/device/Hydraulic oil suction filter element/Standard seats/Two piece multi way valve/Cable type parking brake/Handle/Hydraulic oil dipstick/charge indicator/Engine flameout device/Lifting tilt control lever/Water temperature gauge/Oil pressure report/Blocking shelf/Direction switch/Lifting oil circuit speed limiting valve/Vehicle tools/Key switch/Reversing lamp/Rear combination lamp/Traction pin/Rubber pedal pad/Brake/Reversing buzzer/Roof protection frame rain cover/Headlamps/Cyclone air cleaner/Direction indicator/Rearview mirror/Rugged durable tire/Tilt adjustable steering wheel/Pointer type combination instrument/Light switch/Chronograph/Tilting oil circuit self-locking valve/LCD combination instrument/Lamp guard/Air filter blockage alarm/Full hydraulic universal steering/Hydraulic return filter element



选用配置/Optional configuration

挡风玻璃/Windshield

加长货叉/Extended fork

灭火消声器/Fire silencer

旋转警示灯/Rotating warning light

两级、三级全自由门架/Two stage and three stage full free gantry

驾驶室/cab

各类属具/Various accessories

指定颜色/Assign Color

高配座椅/High configuration seat

暖风机/Air heater

实心轮胎/Solid tyre



着色轮胎 (白、绿)/Colored tyres (white, green)

高排气装置/High exhaust device

减黑烟净化消声器/Black smoke reduction and purification muffler

双空滤器/Double air filter

风扇/Fan

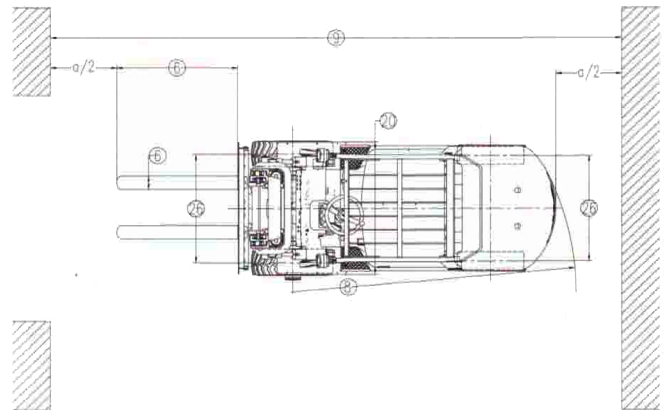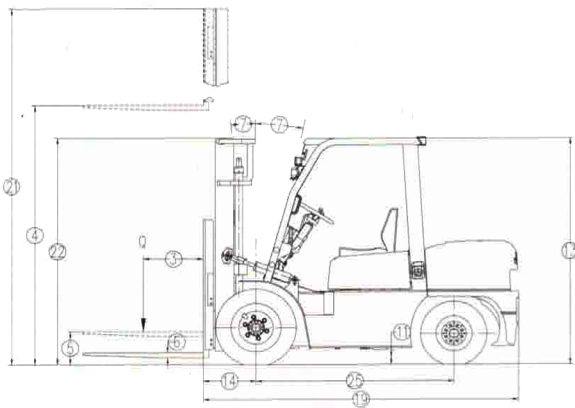



搬运专家 MATERIAL HANDLING EXPERTS
FROM AUTOMOTIVE QUALITY
源于汽车品质